

## Specifications

### HDMI Female to Female and USB 3.2 Type A Female to Type B Female – AAP

#### TRUE 4K specification

Max. 4K Capabilities		
Resolution and Refresh Rate	Chroma Sampling	Max. Bit Depth per Color
4096 x 2160 at 30 Hz	4:4:4	8 bit
3840 x 2160 at 30 Hz		
4096 x 2160 at 60 Hz	4:2:0	
3840 x 2160 at 60 Hz		

Frame rate<sup>1</sup> ..... 24, 25, 30, 50, or 60 fps  
 Chroma sampling<sup>1</sup> ..... 4:4:4, 4:2:2, or 4:2:0  
 Color bit depth<sup>1</sup> ..... 8 bits per color  
 Signal Type ..... HDMI 1.4  
 Max. video data rate ..... 10.2 Gbps (3.4 Gbps per color)

**NOTE:** <sup>1</sup>Subject to the maximum data rate limit. Use our calculator at [www.extron.com/8Kdata](http://www.extron.com/8Kdata) to determine video parameters supported by this data rate.

#### Performance/electrical



Standard ..... USB 3.2 Gen 1

#### General

Mounting ..... Mountable into optional AAP frames  
 Enclosure type ..... Metal  
 Connector type ..... HDMI female to HDMI female;  
 USB 3.2 Gen 1 Type A female to Type B female, reversible  
 Cable length  
     HDMI ..... 12.75" (324 mm)  
     USB 3.2 ..... 12.90" (328 mm)  
 Cable outer diameter  
     HDMI ..... 0.24" (6.0 mm)  
     USB 3.2 ..... 0.25" (6.4 mm)  
 USB data rate ..... SuperSpeed (5 Gbps)

# Specifications • HDMI Female, One USB 3.2 Female AAP (Continued)

Faceplate dimensions ..... 0.7" H x 3.50" W x 0.05" D (single space AAP plate)  
(17.8 mm H x 89 mm W x 1.2 mm D)  
Allow 2.00" (51 mm) depth for cable management.

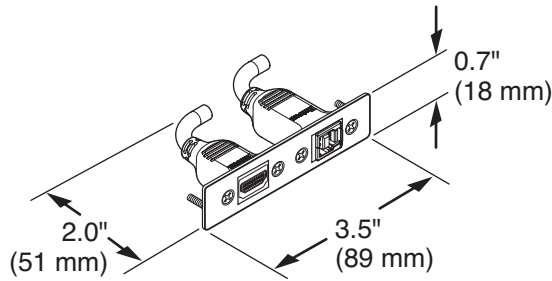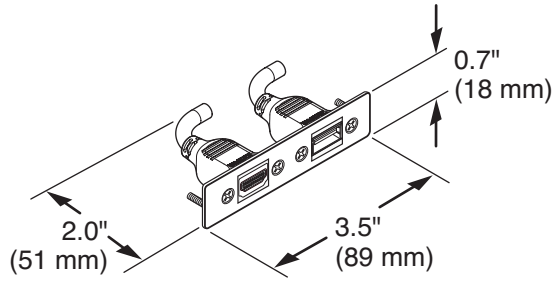

**ATTENTION:** Do not bend cable beyond the recommended depth.

Material ..... Metal  
Product weight ..... 0.1 lb (0.1 kg)  
Regulatory compliance ..... Complies with the appropriate requirements of RoHS, WEEE  
Product warranty ..... 3 years parts and labor

**NOTE:** Specifications are subject to change without notice.

**NOTE:** Shipping weights and dimensions are available at [www.extron.com](http://www.extron.com).

5715-D1