

Specifications

HDMI Female to Female and USB 2.0 Type A Female to Female – AAP

TRUE 4K specification

Max. 4K Capabilities		
Resolution and Refresh Rate	Chroma Sampling	Max. Bit Depth per Color
4096 x 2160 at 30 Hz	4:4:4	8 bit
3840 x 2160 at 30 Hz		
4096 x 2160 at 60 Hz	4:2:0	
3840 x 2160 at 60 Hz		

Frame rate¹ 24, 25, 30, 50, or 60 fps
 Chroma sampling¹ 4:4:4, 4:2:2, or 4:2:0
 Color bit depth¹ 8 bits per color
 Signal Type HDMI 1.4
 Max. video data rate 10.2 Gbps (3.4 Gbps per color)

NOTE: ¹Subject to the maximum data rate limit. Use our calculator at www.extron.com/8Kdatarate to determine video parameters supported by this data rate.

Performance/electrical


Standard USB 2.0

General

Mounting Mountable into optional AAP frames
 Enclosure type Metal
 Connector type HDMI female to HDMI female;
 USB 2.0 Type A female to Type A female
 Cable length
 HDMI 12.75" (324 mm)
 USB 2.0 12.30" (312 mm)
 Cable outer diameter
 HDMI 0.24" (6.0 mm)
 USB 2.0 0.18" (4.6 mm)
 USB data rate High speed (480 Mbps)

Specifications • HDMI Female, One USB A 2.0 Female AAP (Continued)

Faceplate dimensions 0.7" H x 3.5" W x 0.05" D (single space AAP plate)
(17.8 mm H x 89 mm W x 1.2 mm D)
Allow up to 2.00" (51 mm) depth for cable management.

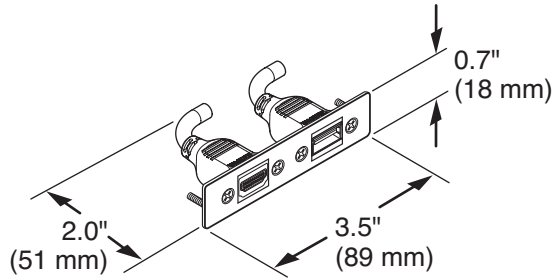

ATTENTION: Do not bend cable beyond the recommended depth.

Material..... Metal
Product weight 0.1 lb (0.1 kg)
Regulatory compliance..... Complies with the appropriate requirements of RoHS, WEEE
Product warranty 3 years parts and labor

NOTE: Specifications are subject to change without notice.

NOTE: Shipping weights and dimensions are available at www.extron.com.

5716-D1