


IN8600 / IN8600P

S-VIDEO EXTENSION CABLES /
PLENUM S-VIDEO CABLES

FEATURES

- S-Video Extension Cables for Connecting Sources, Switchers, Distribution Amplifiers and Displays with S-Video Input / Output Connectors
- Twin Mini-Coax for High Quality Video Transmission
- High-Quality Molded 4-Pin Mini DIN Male Connectors

IN8600 SERIES S-VIDEO EXTENSION CABLES

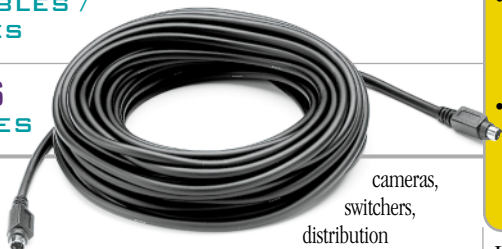

The IN8600 Series cables are high quality extension cables for S-Video (Y/C) signals. The cable is manufactured from two mini-coax cables, ensuring excellent video performance with cable runs up to 100'. The IN8600 S-Video extension cables are ideally suited to provide high performance interconnections between VCRs, cameras, DVD and laser disc players, document

cameras, switchers, distribution amplifiers, video scalars, decoders, monitors, projectors, and other devices with S-Video input and output connectors.

IN8600 Series cables are very flexible for easy handling and are terminated with high quality molded 4-Pin Mini DIN male connectors on each end.

SPECIFICATIONS

Impedance: 75 Ω

Bandwidth of 50' Cable: 83 MHz @ -3dB

Outer Jacket Diameter: 6.0 mm

ORDER INFORMATION

IN8606 6' S-Video Cable
IN8615 15' S-Video Cable
IN8625 25' S-Video Cable
IN8650 50' S-Video Cable

IN8675 75' S-Video Cable
IN86100 100' S-Video Cable
IN8600 Bulk S-Video Cable, 2-Conductor Mini Coax, Price / Foot
IN9401 Deluxe S-Video Connector with Pewter Finish, 4-Pin Mini DIN Male for IN8600 / IN8600P Series Cables

ORDER INFORMATION

S-VIDEO ADAPTERS

IN9093 (1) 4-Pin Mini DIN male to (2) female BNC (Y/C), 6" long
IN9094 (1) 4-Pin Mini DIN female to (2) male BNC (Y/C), 6" long

S-VIDEO ADAPTERS

IN9098 S-Video Adapter Cable, (1) 4-Pin Mini DIN male to (2) BNC Male, 6' long

FEATURES

IN8600P SERIES PLENUM S-VIDEO CABLES



The IN8600P Series is a high quality plenum rated cable for S-Video (Y/C) signals. The cable is manufactured from two 25 AWG mini-coax cables, ensuring excellent video performance with cable runs up to 200 feet. IN8600P Series cable is available in bulk or pre-terminated with 4-Pin mini DIN male connectors in a variety of lengths.

Plenum Jacket

The IN8600P cable features a special outer jacket construction that allows it to be installed in ceiling plenums without using conduit. The IN8600P carries a rating of CL2P.

- High Performance Two Conductor Cable for S-Video Signals
- Plenum Rated — CL2P
- Available in Bulk or Pre-Terminated in a Variety of Lengths
- Bandwidth of 100' Cable: 33 MHz @ -3dB

IN9401 Deluxe S-Video Connectors

Bulk IN8600 / IN8600P series cables can be terminated with our IN9401 Deluxe S-Video Connectors.



SPECIFICATIONS

GENERAL

Conductors: (2) Mini Coax Conductors
Shield: Bare Copper Braid, 95%

Outer Diameter: 0.146" x .302" / 3.71mm x 7.67mm
Regulatory Approval: CL2P

CONDUCTOR SPECS

Gauge: 25 AWG — Solid Conductor
Impedance: 75 ohms +/- 3 ohms
Capacitance: 16.2 pF/ft. nominal
Velocity of Propagation: 80% nominal

Bandwidth — 50': 120 MHz @ -3dB with .7 Vp-p signal
Bandwidth — 100': 33 MHz @ -3dB with .7 Vp-p signal

ORDER INFORMATION

IN8600P Bulk S-Video Cable, 2-Conductor Mini Coax, Plenum Rated, Minimum Order — 200' (Price / Foot)
IN8625P S-Video Cable, Plenum Rated, 4-Pin Mini DIN Male to Male, 25' long
IN8635P S-Video Cable, Plenum Rated, 4-Pin Mini DIN Male to Male, 35' long
IN8650P S-Video Cable, Plenum Rated, 4-Pin Mini DIN Male to Male, 50' long

IN8675P S-Video Cable, Plenum Rated, 4-Pin Mini DIN Male to Male, 75' long
IN86100P S-Video Cable, Plenum Rated, 4-Pin Mini DIN Male to Male, 100' long
IN86150P S-Video Cable, Plenum Rated, 4-Pin Mini DIN Male to Male, 150' long
IN9401 Deluxe S-Video Connector with Pewter Finish, 4-Pin Mini DIN Male for IN8600 / IN8600P Series Cables